




LEH Lead Extruder Horizontal for ESP Pump Cable Manufacture

Expertise, Customer Driven, Service – in Good Hands with NIEHOFF

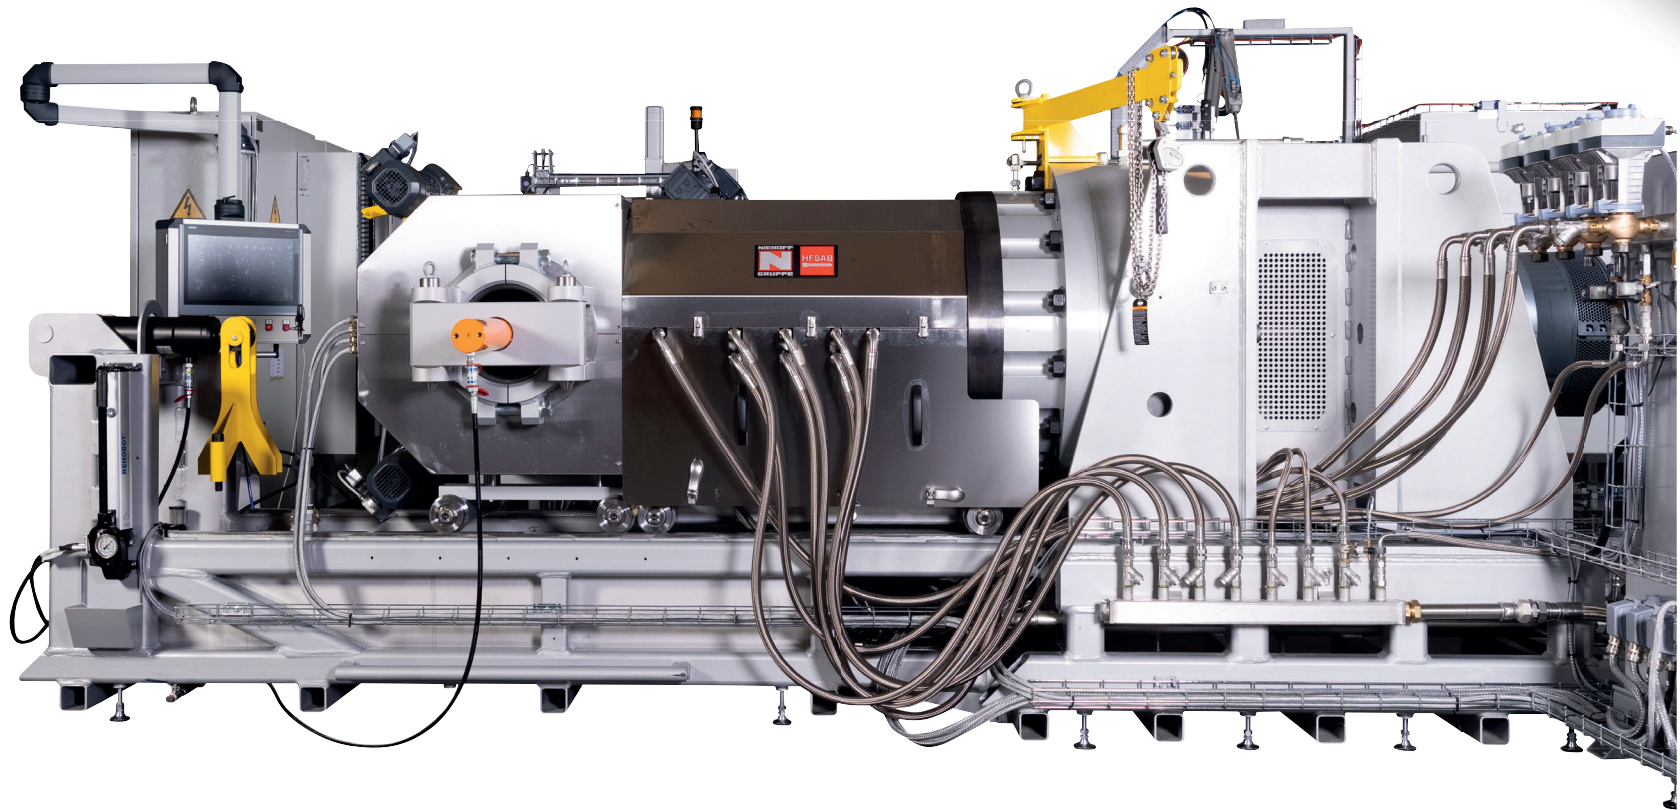

LEH

Horizontal lead extruder for
ESP pump cables

- Specifically designed for higher pressures and higher speeds
- Floor standing with no special foundations required
- Fully automatic
- Temperature control +/- 2°C
- Perfect homogeneous lead sheath with very close tolerances
- Perfect moisture barrier
- Continuous extrusion for several weeks
- Extremely reliable and easy to operate

Technical data (die block range)


die block	diameter over lead
9" B	6-50 mm
radial thickness	from 0,7 mm for smallest diameter

Outputs - Alloy dependent

line speed (PbCu)	up to 50 m/min (diameter dependent)
-------------------	--

Melting pot size

10 TON

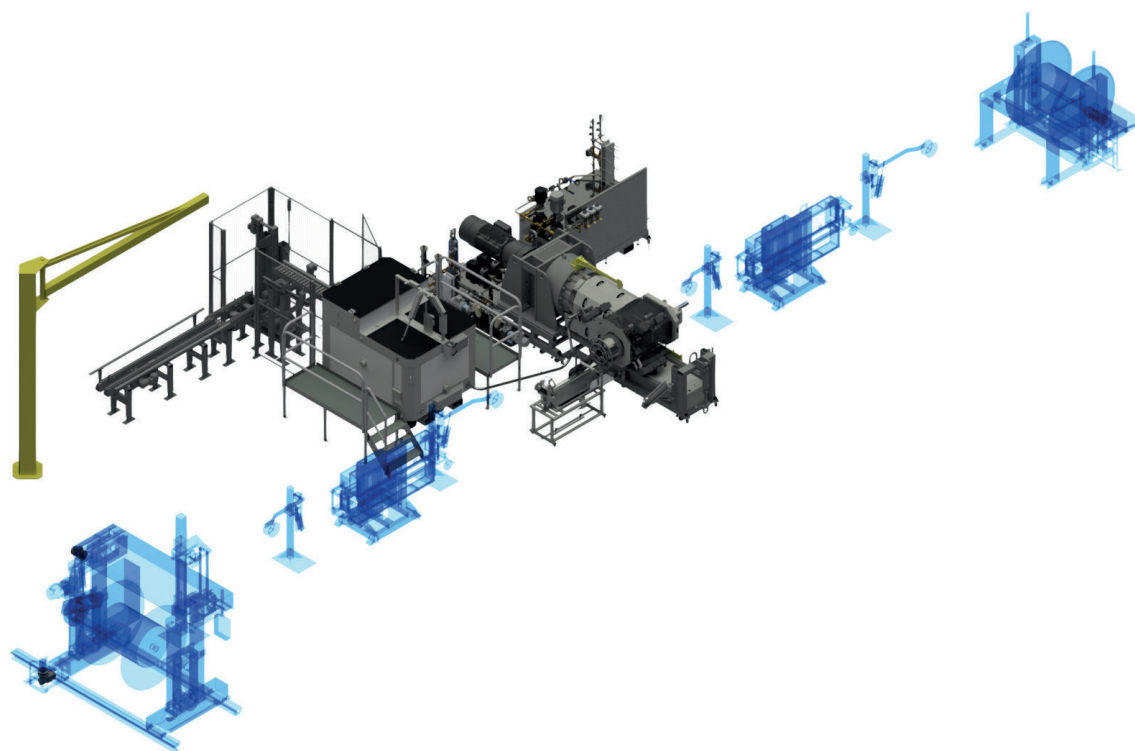

We reserve the right to modify technical specifications according to technical improvement and advances. 03.2026