

LEH Lead Extruder Horizontal

Expertise, Customer Driven, Service – in Good Hands with NIEHOFF



LEH

Horizontal lead extruder for the following applications: LV/MV/HV and EHV cables, ESP pump cables, oil and gas industry cables, submarine cables, oil impregnated paper cables, telecommunication cables and rubber cables vulcanised under a lead sheath

- Floor standing with no special foundations required
- Customers in more than 50 countries
- 60+ horizontal extruders sold since 2005
- Fully automatic
- Temperature control +/- 2°C
- Perfect homogeneous lead sheath with very close tolerances
- Perfect moisture barrier
- Continuous extrusion for several weeks
- Extremely reliable and easy to operate

Technical data (die block range)


die block	diameter over lead
9" B	6-50 mm
9"	9-85 mm
11"	10-110 mm
12 1/4"	50-125 mm
13 1/4"	85-150 mm
14.8"	110-190 mm

Outputs - Alloy dependent

Type 3 Extruder:	Up to 25 kg/min
Type 4 Extruder:	Up to 35 kg/min
Type 5 Extruder:	Up to 55 kg/min

Melting pot sizes

10 TON
18 TON
35 TON
60 TON

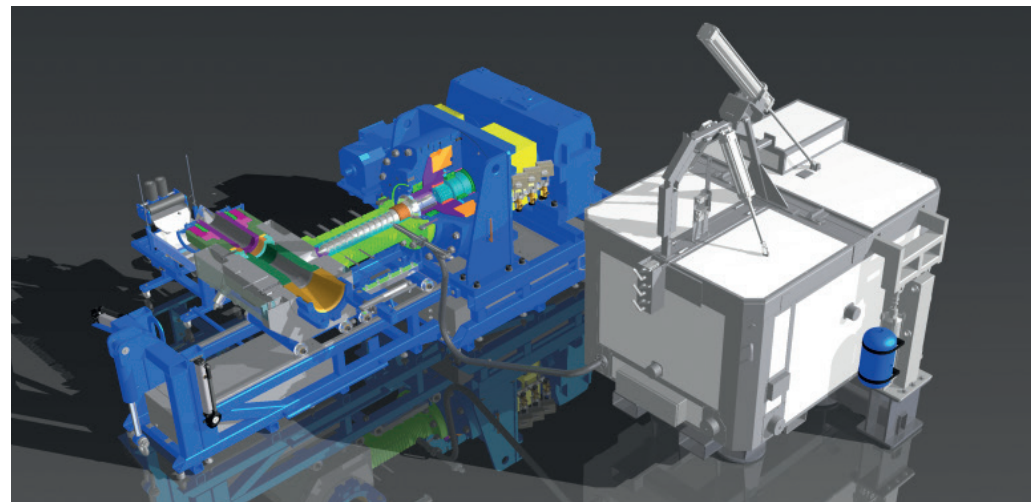

We reserve the right to modify technical specifications according to technical improvement and advances. 03.2020